

INSTRUCTION MANUAL



Don TL 1 Black
103914




⏻ On/Off mode

- Touch the on/off switch, coming with indicator light, the initial reading mode running. Touch switch again to turn off the lamp. It will memorize the CCT & brightness when turn on the lamp again.

🌈 Multi color temperature Mode


- Press the light mode, coming with indicator light, keep pressing the "LOW" "HIGH" key to stepless reduce or increase brightness, coming with indicator light, which make you find the key quickly.

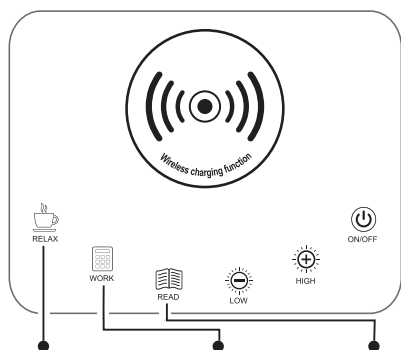

Leisure mode 3000K(±300K) working mode 4300K(±300K) reading mode 6000K(±300K)

★ Note:


The power between the lamp post and the base is connected by the "Three grades 3.5mm headphone plug". Connect the lamp post to the base before using and fix it with screws, Please refer the "Installation Guide".

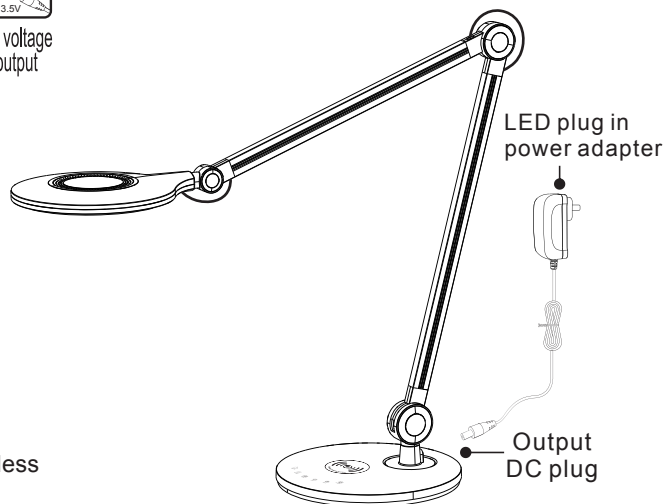


Qi Standard Wireless charging mode

- Wireless charging output specification: 5V/500mA-1000mA
- If the phone itself has Qi wireless receive coil, it can be charged directly.
- If the phone itself has no Qi wireless receive coil, it failed to charge directly or purchase wireless charging receiver then realize wireless charging.
- Please make the phone aim at the platform with wireless charging mark when charging. Different cell phone, its wireless receiver may seated in different place inside the phone, Please move the phone slowly until sign of being charging. If Phone's wireless receiver failed to aim at lamp's wireless coil, it may lower the charging speed, or even generate over-heat then stop charging.
- If failed to be charged, phone's wireless receiver may not aim at lamp's wireless coil, out of range of lamp's wireless coil, or the wireless receiver failed to meet Qi standard.
- During charging process, both phone and lamp's charger generate heat. To make them have good heat-dissipation, any staff to cover them is not allowed.
- please keep the lamps' charger away from any magnetic and metal staff, say magnet, bank card, ID card, scissor, coin, etc.
- If cell phone case is too thick, it may effect the charging result. Please make sure case or interlayer less than 2mm thickness.

Installation Guide:



(1) Insert the lamppost into the base hole, pay attention to the direction of the positioning card.




(2) Take the screws from the base back side, fix them with a screwdriver.


103914

600	LM
10	W
3000/4300/6000	K
>80	Ra
25000	H

SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference



1. The luminaires may only be installed by authorized and qualified technicians according the valid regulations for electrical installation.
2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
4. Exterior lighting must not be installed during rain.
6. Take account of the minimal separation distance from other objects and the room required around the fitting.
7. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
8. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
9. When replacing a halogen lamp, wait for it to cool, for a minimum of 5 minutes.
10. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
11. Take account of all available technical information.
12. Take note of the symbols when connecting wires:
N = Neutral **L = Live**  **= Earth**
13. Meaning of symbols:



For indoor use only, where direct contact with water is impossible



Protection Class I: the fitting must be earthed



Protection Class II: the fitting is doubled insulated and does not require earthing



Protection Class III: the fitting is low voltage



Minimum distance from lighted objects (meters)



Only the self-shielded halogen lamp should be used with the luminaire



Strip the wire to the indicated length (mm); different items require different length



Connect using the specified cable; different items require different cables



The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceed; different items require different kind of light sources with different bulb icons



The armature is designed to work only with the indicated voltage. Different items require different working voltage.



The luminaire can be used in combination with a dimmer



The reference light angle and light space of the luminaire



This luminaire cannot be disposed together with normal domestic waste in standard rubbish can, but you have to bring it to a staging area for electrical waste