INSTRUCTION MANUAL










Q

Suplux SL 3 Black and Satin/Suplux SL 5 Black and Satin/Jeana SL 3 Black/Jeana SL 5 Black

94920/94921/94922/94923

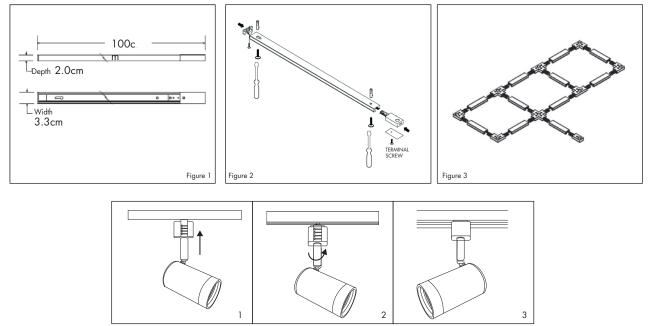


TO INSTALL:

1) Align arrows on spotlight track adaptor with the polarity groove on the track.


2) Push up into track and rotate CLOCKWISE 90° while gently pulling back on the sliding cover until it locks into place.

TO REMOVE: Hold the spotlight and gently pull down on

the track adaptor and rotate ANTI-CLOCKWISE 90°.



94920/94921



94922/94923



SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference

- 1. The luminaires may only be installed by authorized and qualified technicians according the valid regulations for electrical installation.
- 2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
- 3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
- 4. Exterior lighting must not be installed during rain.
- 6. Take account of the minimal separation distance from other objects and the room required around the fitting.
- 7. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
- 8. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
- 9. When replacing a halogen lamp, wait for it to cool, for a minimum of 5 minutes.
- 10. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
- 11. Take account of all available technical information.
- 12. Take note of the symbols when connecting wires:

13. Meaning of symbols

ΟΑΖΟΑ

Meaning of symbols:	
	For indoor use only, where direct contact with water is impossible
	This icon indicates the level of water-proof and dust-proof
	Protection Class I: the fitting must be earthed
	Protection Class II: the fitting is doubled insulated and does not require earthing
	Protection Class III: the fitting is low voltage
0.5m	Minimum distance from lighted objects (meters)
	Only the self-shielded halogen lamp should be used with the luminaire
8mm	Strip the wire to the indicated length (mm);different items require different length
3x min.0,75mm ²	Connect using the specified cable; different items require different cables
Max.ø50mm GU10 2Max.50W	The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceed; different items require different kind of light sources with different bulb icons
220-240V~ 50Hz	The armature is designed to work only with the indicated voltage. Different items require different working voltage.
	The luminaire can be used in combination with a dimmer
Light Angle	The reference light angle and light space of the luminaire
X	This luminaire cannot be disposed together with normal domestic waste in standard rubbish can, but you have to bring it to a staging area for electrical waste

