


INSTRUCTION MANUAL

(NL) Gebruikte symbolen

(GB) Safety Precautions / (FR) Symboles utilisés / (DE) Verwendete Symbole / (PL) Stosowane symbole / (NO) Brukte symboler / (DK) Brugte symboler / (SE) Använda symboler / (FI) Käytetyt symbolit / (IT) Simboli usati / (ES) Símbolos empleados / (CZ) Použité symboly / (PT) Símbolos utilizados / (GR) Χρησιμοποιούμενα σύμβολα



Malai Light String 8M 108094

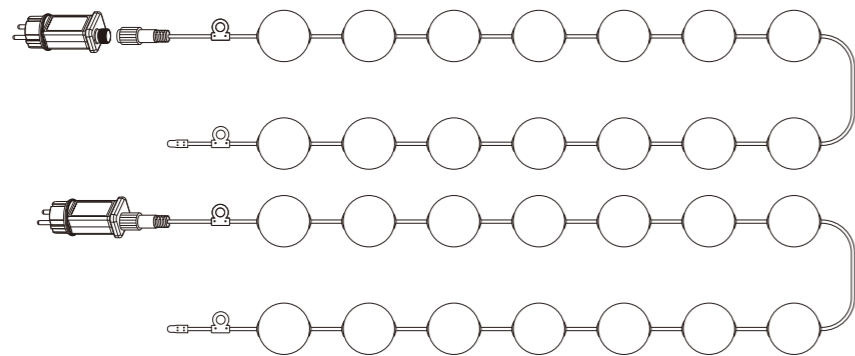


PREPARATION BEFORE INSTALLATION:

- Check the connections: Whether the ball and the cable are screwed together. These connections may have become loose during transportation or storage. Please check and make sure they are tightly connected.
- Fixing the connection: If a loose connection is found, hold both sides of the ball hands and rotate clockwise until firmly connected. This not only ensures a secure connection but also increases water resistance.
- Check correct operation: To make sure the light string works properly, insert the transformer into the socket and check whether the entire light string lights up. If it is not lit, contact your distributor.
- Prepare hanging tools: We recommend using cable ties or mounting hooks to hang the light string, ensuring safety and reliability. Do not use sharp mounting elements.

ATTENTION:

- The tightness class is only met if all the conditions listed below are met. If the recommendations are not followed, the manufacturer is not responsible for any resulting damage or loss.
- The transformer can be used indoors and outdoors.
- Disconnect the transformer from the mains when not in use.
- Avoid damaging the cable insulation.
- Do not allow any plastic part to come into contact with fire.
- Avoid excessive pulling on the wires or balls to prevent damage.
- Check cables and connectors regularly for damage or aging and replace them immediately.
- Only use a transformer that complies with this specification. Using other types of transformers may cause the light string to burn or cause other safety hazards.
- Only use the bulb supplied by us. Other types of bulbs may burn the light string or create other safety hazards.
- To avoid unnecessary losses, please follow the installation instructions strictly.
- When using externally, make sure that the power plug is in a socket with a higher tightness class.
- Keep this instruction leaflet for future reference.
- Keep out of reach of children.

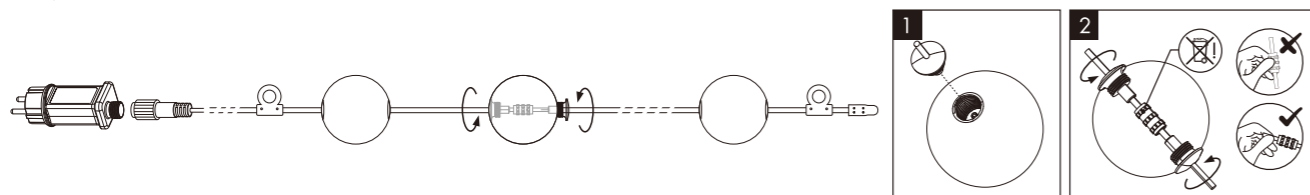


TROUBLESHOOTING:

- The light string does not light up: Check if the transformer is properly connected. If the transformer is damaged, please contact your distributor for replacement.
- Do not use non-standard transformers.
- Single or multiple balls do not light: This may be due to loose wire connections to the ball. If tightening the ball and wire does not solve the problem, it is possible that the bulb inside the ball is damaged.
- Please contact your distributor for spare parts and replacement according to the provided illustrations.
- Other problems: If you encounter other problems or failures during use, please contact our distributor or service center for professional technical support and assistance. We will do our best to provide the best solutions to meet your needs.

INSTRUCTION MANUAL

Malai Light String 8M 108094

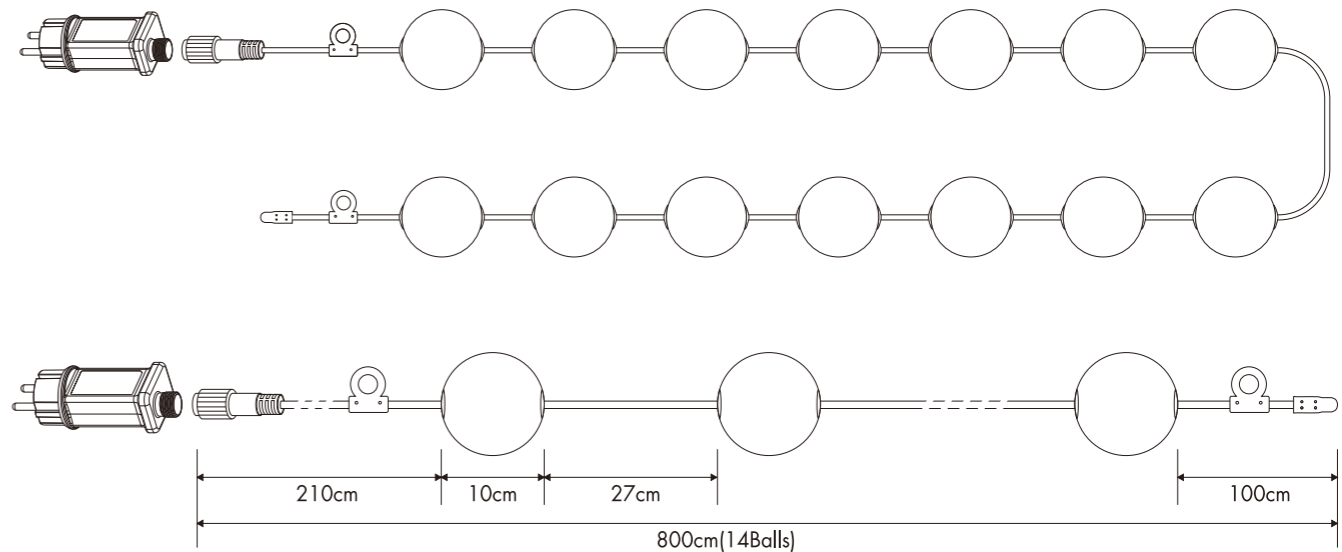

Light String
incl. 14xLED QL7001302
994lm Module
860lm Lamp
11.2W LED Module
12W Lamp
12V DC
2500K
CRI>80
30000 h
15000 ON/OFF

(DE) Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G
(EN) This product contains a light source of energy efficiency class G
(FR) Ce produit comprend une source de lumière de classe d'efficacité énergétique G
(NL) Dit product bevat een lichtbron van energie-efficiëntieklasse G
(PL) Produkt ten zawiera źródło światła o klasie efektywności energetycznej G
(NO) Dette produktet inneholder en lyskilde i energieeffektivitetsklasse G
(DK) Dette produkt indeholder en lyskilde af energieeffektklasse G
(SE) Denna produkt innehåller en ljuskälla i energieffektivitetsklass G
(FI) Tämä tuote sisältää energiatehokkuusluokan G valonlähteen
(IT) Questo prodotto contiene una sorgente luminosa della classe di efficienza energetica G
(ES) Este producto contiene una fuente de luz de la clase de eficiencia energética G
(CZ) Tento výrobek obsahuje světelný zdroj třídy energetické účinnosti G
(PT) Este produto contém uma fonte de luz da classe de eficiência energética G
(GR) Αυτό το προϊόν περιέχει μια φωτεινή πηγή ενεργειακής απόδοσης κλάσης G
(SK) Tento výrobok obsahuje zdroj svetla triedy energetickej efektivity G


QR	EAN
	8718881164712

SAFETY INSTRUCTION


Please study the instruction manual and below information carefully before installing or using this product.
Please keep this user manual for further reference

1. The luminaires may only be installed by authorized and qualified technicians according the valid regulations for electrical installation.
2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
4. Exterior lighting must not be installed during rain.
5. Take account of the minimal separation distance from other objects and the room required around the fitting.
6. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
7. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
8. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
9. Take account of all available technical information.
10. Meaning of symbols:


 This icon indicates the level of water-proof and dust-proof


 Protection Class I: the fitting must be earthed

 Protection Class II: the fitting is doubled insulated and does not require earthing


 Protection Class III: the fitting is low voltage

 Minimum distance from lighted objects (meters)

 The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceed; different items require different kind of light sources with different bulb icons

 The armature is designed to work only with the indicated voltage. Different items require different working voltage.

 The luminaire can be used in combination with a dimmer







 The luminaire can be dimmed by wall switch

 The reference light angle and light space of the luminaire



This luminaire cannot be disposed together with normal domestic waste in standard rubbish can, but you have to bring it to a staging area for electrical waste

11. Take note of the symbols when connecting wires:

	(DE)	(GB)	(FR)	(NL)	(PL)	(NO)	(DK)
	Stromführender Leiter	Live conductor	Conducteur	Spanningvoerende draad	Przewód prądowy	Strømførende leder	Strømførende leder
	Schutzleiter	Earth conductor	Conducteur de protection (terre)	Aardkabel	Przewód uziemiający	Jordledningen	Jordledningen
	Neutralleiter	Neutral conductor	Conducteur neutre	Nulleider	Przewód zerowy	Nøytralleder	Neutralleider
	(SE)	(FI)	(IT)	(ES)	(CZ)	(PT)	(GR)
	Strömförande ledare	Virtajohdin	Conduttore sotto tensione	Conductor de corriente	Vodič pod napětím	Condutor vivo	Ρευματοφόρος αγωγός
	Skyddsledare	Suojajohdin	Conduttore di terra	Conductor de protección	Ochranný vodič	Condutor de terra	Αγωγός γείωσης
	Neutralledare	Nollajohdin	Conduttore neutro	Conductor neutro	Neutrální vodič	Condutor neutro	Ουδέτερος αγωγός