INSTRUCTION MANUAL

IP44 | 220~240V 50HZ | Max.ø70mm GU10 2xMax.35W | 3x min.0,75mm² | 0.5m

Baleno WL 2 AR70 Lux
104091 / 104092

1.

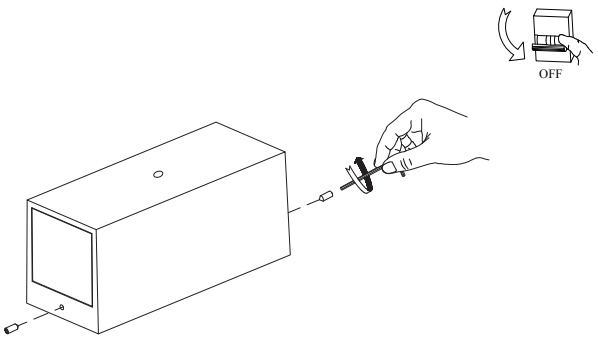

2.

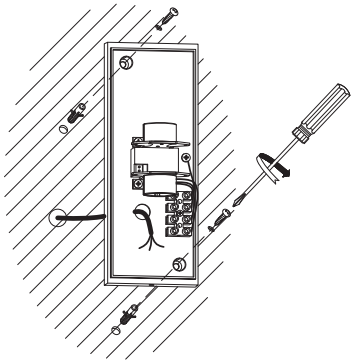

3.

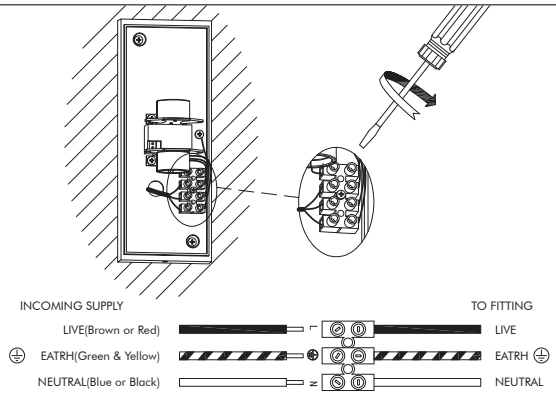

4.

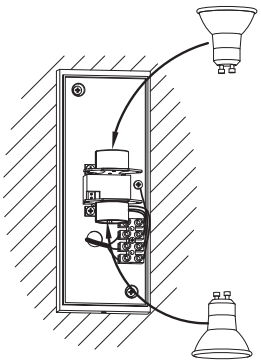

5.

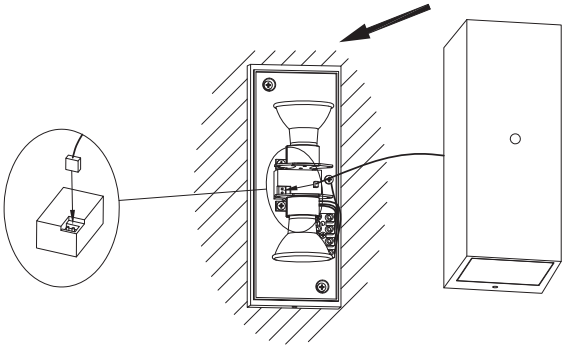

6.

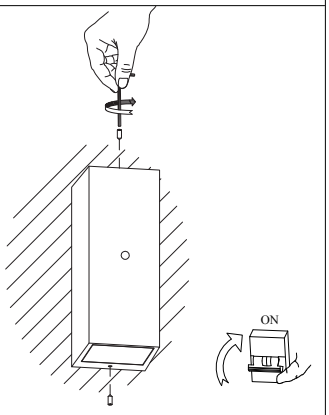

Important: Product must be installed by a qualifed electrician

Automatic: Fitting will operate on and off automatically at dusk and dawn.

Time Delay: Fitting incorporates a time delay to prevent accidental trigger operation by car headlighst and flashes.
Pre-set 15-30sec delay to avoid false trigger (approx.).

Ambient Light: 5~45Lumen (approx.).

* Avoid a position where direct light from another source can fall on the control. Position out of direct sunlight if possible (not essential).

Overall Size:



FittinQ B.V.
Smaragdweg 52, 5527 LB Hapert, The Netherlands
www.qazqa.nl

QAZQA