

INSTALLATION INSTRUCTIONS

Please read these instructions carefully before attempting to install this product. It is advisable to keep these instructions in a safe place for future reference. **IF IN DOUBT, CONSULT A QUALIFIED ELECTRICIAN.**

PARAMETER:

IP Rating	IP65
Rated Voltage	AC 220-240V, 50Hz
Rated Wattage	max.40W
Protection Class	Class I
Lampholder	G9

Electrical Installation

Always switch off the electricity supply at the mains during installation and maintenance. We recommend that the fuse is withdrawn or circuit breaker switched off at the distribution board whilst work is in progress (turning off the light switch is not sufficient).

1. Separate the backing plate from the fitting by removing the securing screws.
2. Use the backing plate as a template to mark the position of the drill holes. Drill with a suitable drill bit and plug the mounting holes with suitable plastic wall plugs. Take care not to foul any mains cables or pipes below the surface while drilling.
3. Use a sharp object to pierce the rubber grommet in the backing plate.
4. Feed the incoming mains cable through the rubber grommet in the wall bracket and attach the wall bracket to the wall with suitable wall screws.
5. Connection to the mains should be made using the general wiring code shown on diagram. Ensure that the connections are tight and no loose strands of wire are left out of the terminal block. After connection of the wire, the insulating paper cover of the terminal block must be restored to its original location.
6. Fit the recommended light bulb type: **Max. 40W G9.**
7. Fasten the cover onto the backing plate and tighten the securing screws
8. Restore mains supply and switch on.

Bulb Replacement

1. Switch off product and allow to cool.
2. Remove the cover by loosening the screws.
3. Obtain new bulb.
4. Insert the bulb in lampholder.
5. Replace the cover.
6. Restore mains supply and switch on.


Care and Use





WWW.QAZQA.COM

1. This product must be earthed.
2. We suggest that you use H05RN-F specification cable (not supplied) which is an outdoor grade, rubber sheathed cable. The cable must have a minimum cross sectional area of 1.0mm².
3. Please use the double-pole-off switch.
4. Replace any cracked/damaged diffuser immediately-do not use if they are damaged.

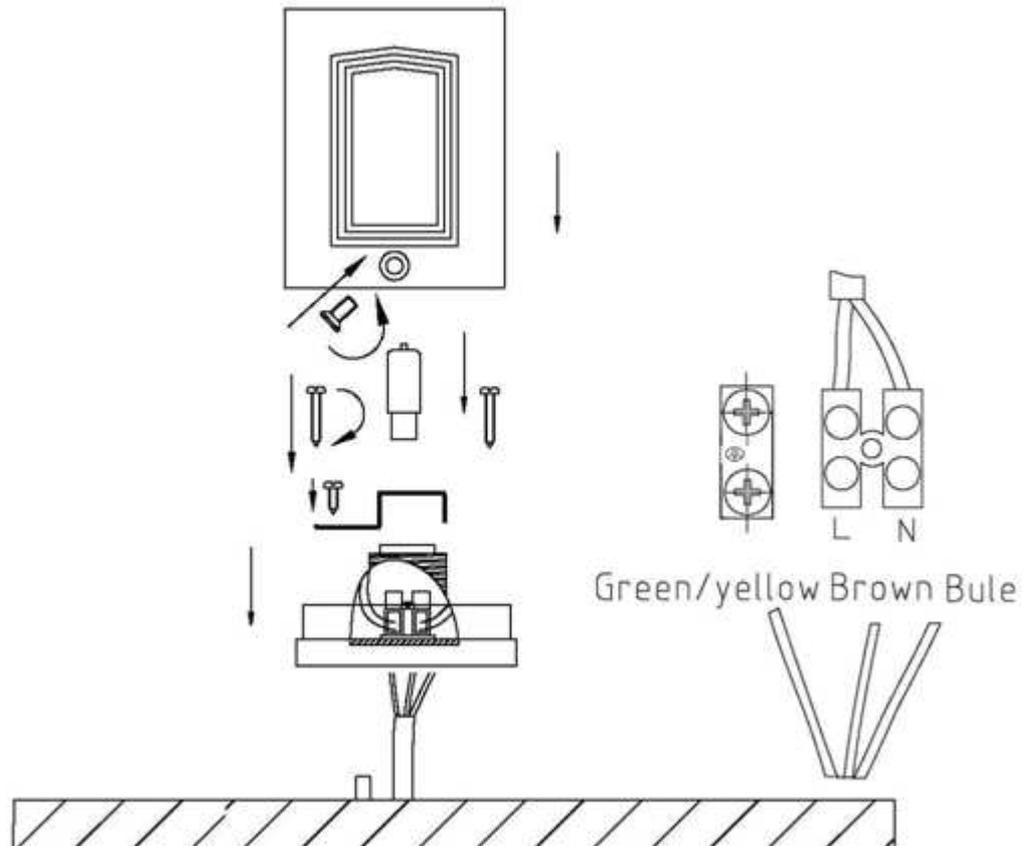

44958

QAZQA