

INSTALLATION INSTRUCTIONS

Please read these instructions carefully before attempting to install this product. It is advisable to keep these instructions in a safe place for future reference. IF IN DOUBT, CONSULT A QUALIFIED ELECTRICIAN.


PARAMETER:

IP Rating	IP44
Rated Voltage	AC 220-240V, 50Hz
Rated Wattage	Max.60W
Protection Class	Class I
Lampholder	E27

Electrical Installation

Always switch off the electricity supply at the mains during installation and maintenance. We recommend that the fuse is withdrawn or circuit breaker switched off at the distribution board whilst work is in progress (turning off the light switch is not sufficient).

1. Separate the lamp base from the fitting by removing the screws.
2. After choosing the desired location for the fitting, use the lamp base as a template to mark the position of the drill holes. Drill with a suitable drill bit and plug the mounting holes with suitable plastic wall plugs. Take care not to foul any mains cables or pipes below the surface while drilling.
3. Use a sharp object to pierce the rubber grommet in the base.
4. Feed the incoming mains cable through the rubber grommet in the base and attach the base to the wall with suitable wall screws.
5. Connect to the mains should be made using the general wiring code shown on diagram. Ensure that the connections are tight and no loose strands of wire are left out of the terminal block.

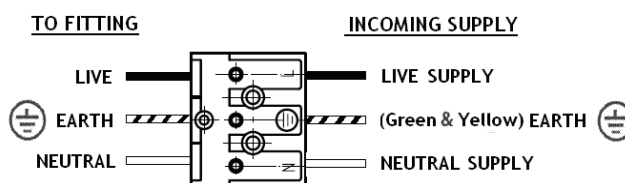

6. Fit the recommended light bulb type: **Max. 60W E27.**
7. Fasten the guard onto the lamp base and tighten the screws.
8. Restore mains supply and switch on.

Bulb Replacement


1. Switch off product and allow to cool.
2. Remove the guard by loosening the screws.
3. Obtain new bulb, type E27 GLS, max 60W. Do not use any other type of bulb.
4. Insert the bulb in lampholder.
5. Replace the guard and secure the guard with screws.
6. Restore mains supply and switch on.

Care and Use



WWW.QAZQA.COM

1. This product must be earthed.
2. We suggest that you use H05RN-F specification cable (not supplied) which is an outdoor grade, rubber sheathed cable. The cable must have a minimum cross sectional area of 1.0mm².
3. Please use the double-pole-off switch.
4. Replace any cracked/damaged diffuser immediately-do not use if they are damaged.

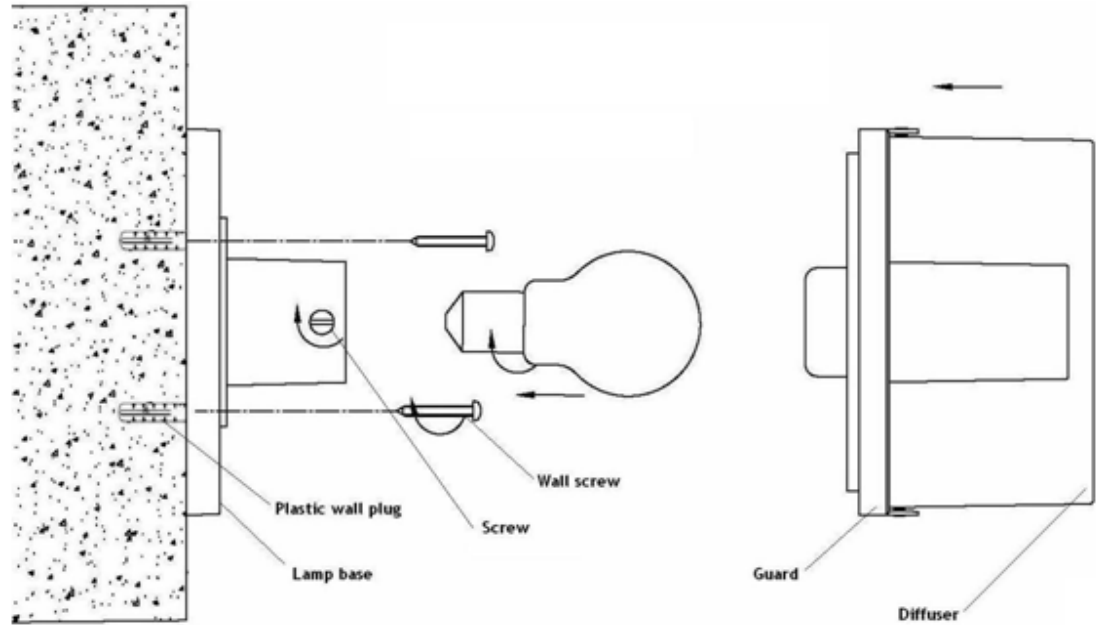

70079

QAZQA