

INSTRUCTION MANUAL

(NL) Gebruikte symbolen


(GB) Safety Precautions / (FR) Symboles utilisés / (DE) Verwendete Symbole / (PL) Stosowane symbole / (NO) Brukte symboler / (DK) Brugte symboler / (SE) Använda symboler / (FI) Käytetyt symbolit / (IT) Simboli usati / (ES) Símbolos empleados / (CZ) Použité symboly / (PT) Símbolos utilizados / (GR) Χρησιμοποιούμενα σύμβολα



IP44



Ludger FL 20 White Rechargeable Solar 107765

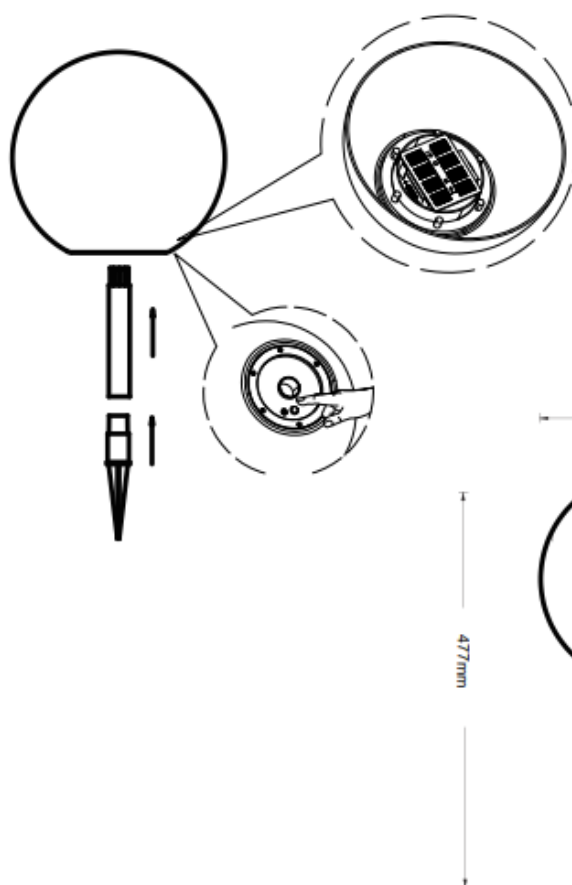

Garden lamp
60lm Module
22lm Lamp
0.5W Total
3.2Vdc Li-po,
battery/ 600mAh
3000K+ RGB
CRI>80
30000h
15000 ON/OFF

Dimming range /lumen / battery life		Full charging time	Life cycle	Specification	
3000K	RGB	by Solar	Solar panel	Battery	Solar panel
22lm 18hrs	18hrs	8hrs	5 years	14500 Li-po 600mA	Crystal solar panel 3.79V, 120mA

FitinQ B.V.
Smaragdweg 52, 5527 LB Hapert,
The Netherlands
www.qazqa.nl

FitinQ LTD
55 Baker Street,
London, W1U 7EU
United Kingdom

QAZQA

INSTRUCTION MANUAL

(NL) Gebruikte symbolen


(GB) Safety Precautions / (FR) Symboles utilisés / (DE) Verwendete Symbole / (PL) Stosowane symbole / (NO) Brukte symboler / (DK) Brugte symboler / (SE) Använda symboler / (FI) Käytetyt symbolit / (IT) Simboli usati / (ES) Símbolos empleados / (CZ) Použité symboly / (PT) Símbolos utilizados / (GR) Χρησιμοποιούμενα σύμβολα



IP44



Ludger FL 25 White Rechargeable Solar 107766

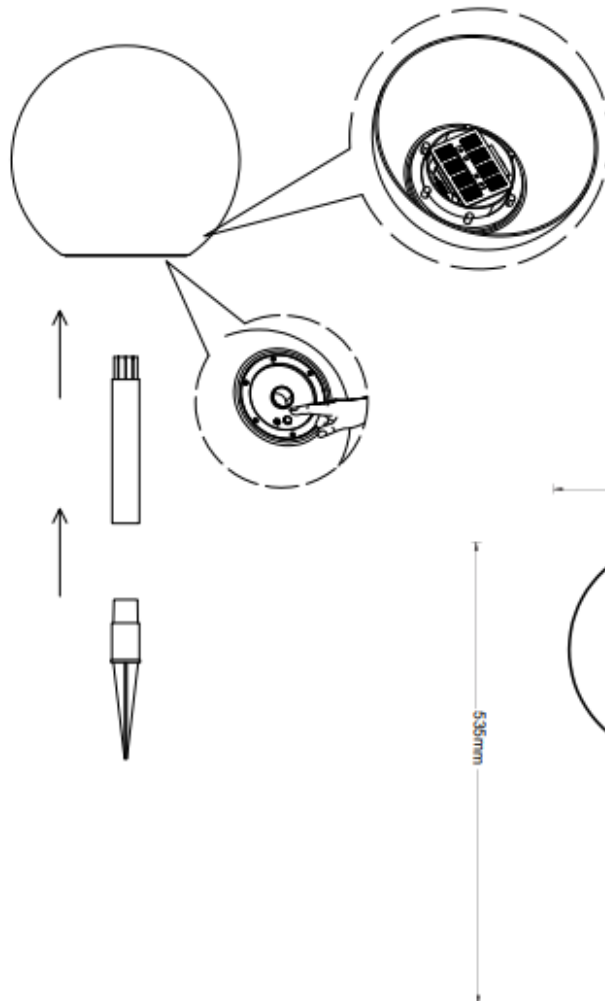

Garden lamp
60lm Module
22lm Lamp
0.5W Total
3.2Vdc Li-po,
battery/ 600mAh
3000K+ RGB
CRI>80
30000h
15000 ON/OFF

Dimming range / lumen / battery life		Full charging time	Life cycle	Specification	
3000K	RGB	by Solar	Solar panel	Battery	Solar panel
22lm 18hrs	18hrs	8hrs	5 years	14500 Li-po 600mA	Crystal solar panel 3.79V, 120mA

FittinQ B.V.
Smaragdweg 52, 5527 LB Hapert,
The Netherlands
www.qazqa.nl

FittinQ LTD
55 Baker Street,
London, W1U 7EU
United Kingdom

QAZQA

INSTRUCTION MANUAL

(NL) Gebruikte symbolen


(GB) Safety Precautions / (FR) Symboles utilisés / (DE) Verwendete Symbole / (PL) Stosowane symbole / (NO) Brukte symboler / (DK) Brugte symboler / (SE) Använda symboler / (FI) Käytetyt symbolit / (IT) Simboli usati / (ES) Símbolos empleados / (CZ) Použité symboly / (PT) Símbolos utilizados / (GR) Χρησιμοποιούμενα σύμβολα



IP44



Ludger FL 30 White Rechargeable Solar 107767

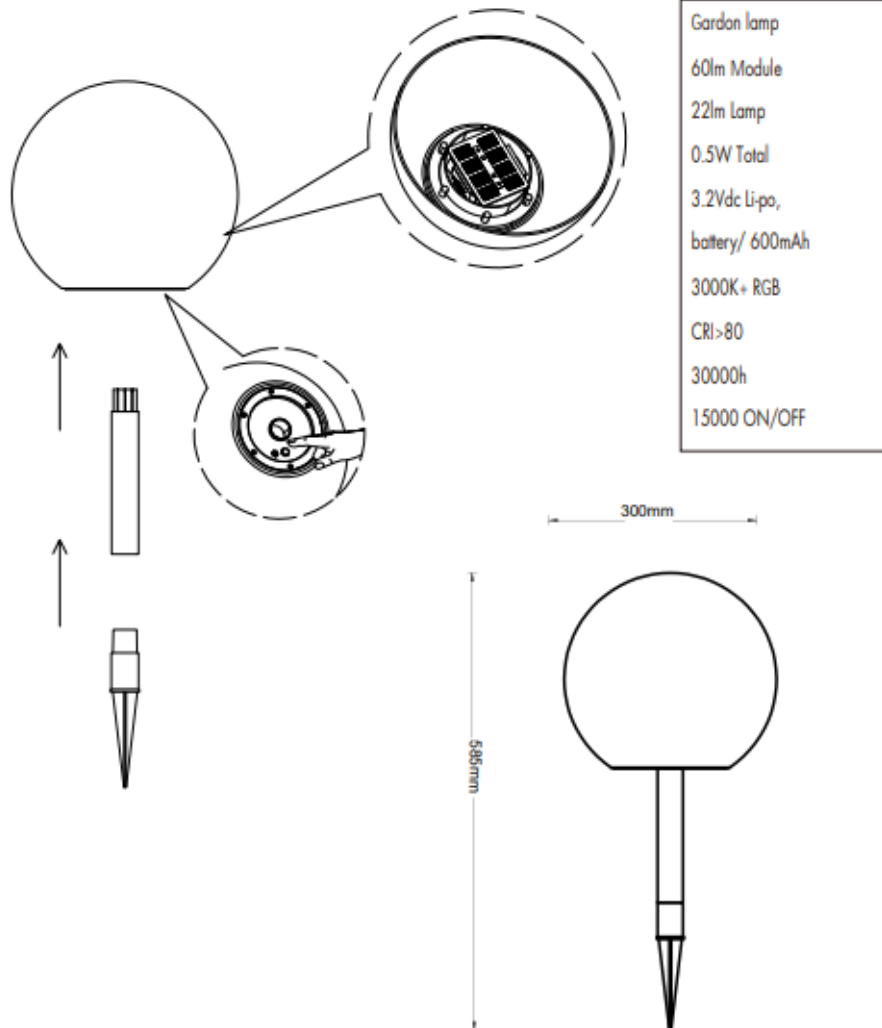

Dimming range / lumen / battery life	Full charging time	Life cycle	Specification	
3000K	RGB	by Solar	Battery	Solar panel
22lm 18hrs	18hrs	8hrs	14500 Li-po 600mA	Crystal solar panel 3.79V, 120mA

FitinQ B.V.
Smoragdweg 52, 5527 LB Hapert,
The Netherlands
www.qazqa.nl

FitinQ LTD
55 Baker Street,
London, W1U 7EU
United Kingdom

QAZQA

SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product.
Please keep this user manual for further reference

1. The luminaires may only be installed by authorized and qualified technicians according to the valid regulations for electrical installation.
2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
4. Exterior lighting must not be installed during rain.
5. Take account of the minimal separation distance from other objects and the room required around the fitting.
6. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
7. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
8. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
9. Take account of all available technical information.
10. Meaning of symbols:



This icon indicates the level of water-proof and dust-proof



Protection Class I: the fitting must be earthed



Protection Class II: the fitting is doubled insulated and does not require earthing



Protection Class III: the fitting is low voltage



Minimum distance from lighted objects (meters)



The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceeded; different items require different kind of light sources with different bulb icons



The armature is designed to work only with the indicated voltage. Different items require different working voltage.



The luminaire can be used in combination with a dimmer



The luminaire can be dimmed by wall switch




The reference light angle and light space of the luminaire



This luminaire cannot be disposed together with normal domestic waste in standard rubbish can, but you have to bring it to a staging area for electrical waste

11. Take note of the symbols when connecting wires:



	(DE)	(GB)	(FR)	(NL)	(PL)	(NO)	(DK)
L	Stromführender Leiter	Live conductor	Conducteur	Spanningvoerende draad	Przewód prądowy	Strømførende leder	Strømførende leder
⊕	Schutzleiter	Earth conductor	Conducteur de protection (terre)	Aardkabel	Przewód uziemiający	Jordledningen	Jordledningen
N	Neutralleiter	Neutral conductor	Conducteur neutre	Nullleider	Przewód zerowy	Nøytralleder	Neutralleder
	(SE)	(FI)	(IT)	(ES)	(CZ)	(PT)	(GR)
L	Strömförande ledare	Virtajohdin	Conduttore sotto tensione	Conductor de corriente	Vodič pod napětím	Condutor vivo	Περιστασφόρος αγωγός
⊕	Skyddsledare	Suojajohdin	Conduttore di terra	Conductor de protección	Ochranný vodič	Condutor de terra	Αγωγός γείωσης
N	Neutralledare	Nollajohdin	Conduttore neutro	Conductor neutro	Neutrální vodič	Condutor neutro	Ουδέτερος αγωγός

QAZQA B.V.
Smaragdweg 52, 5527 LB Hapert,
The Netherlands
www.qazqa.nl

QAZQA LTD
55 Baker Street,
London, W1U 7EU
United Kingdom

QAZQA