

Direction

Note:Please read carefully installation and preserve it well.

INSTALLATION DIRECTION:

Before attempting to install units,ensure power is off,and please pay attention to the following steps:

1 Installation of lamp and reserved lamp.(fig 1)

- First install plastic expansion piece in wall.
- Insert two fixed screws in plastic plate.
- Fix the plastic plate on the plastic expansion piece with self-tapping screw.
- Connect supply leads with terminal: brown(L) to brown, blue(N) to blue and greenish-yellow \oplus to greenish-yellow.
- Insert the terminal on plastic plate.
- Then put the lamp on the fixed screws, and twist covered screw.
- Insert the new bulb in lampholder, bulb must not exceed wattage specified on fixture label.

2 Installation of post lamp.(fig 2)

- Fix the tube installed lamp on installation surface.
- Connect supply leads with terminal: brown(L) to brown, blue(N) to blue and greenish-yellow \oplus to greenish-yellow.
- Insert the terminal in the tube.
- Install the lamp on the post with cross screw.
- Insert the new bulb in lampholder, bulb must not exceed wattage specified on fixture label.

3 Installation of standing lamp and half-hexagan lamp.(fig 3)

- First install plastic expansion piece on the surface of installing lamp.
- Connect supply leads with terminal: brown(L) to brown, blue(N) to blue and greenish-yellow \oplus to greenish-yellow.
- Install the lamp with the self-tapping screw on plastic expansion piece.
- Insert the new bulb in lampholder, bulb must not exceed wattage specified on fixture label.

4 Installation of pendent lamp.(fig 4)

- Put the wire through chain sling.
- Twist both ends of chain sling on lamp and fixed plate.
- Install the plastic expansion piece on the ceiling installed lamp.
- Insert two fixed screws on plastic plate.
- Fix the plastic plate on the ceiling with self-tapping screw.
- Connect supply leads with terminal: brown(L) to brown, blue(N) to blue, and greenish-yellow \oplus to greenish-yellow.
- Insert the terminal on plastic plate.
- Then insert the lamp on the fixed screws, and twist covered screw.
- Insert the new bulb in lampholder, bulb must not exceed wattage specified on fixture label.

SAFETY DIRECTION:

- Before starting the installation, please ensure to disconnect the power.
- After turning on the switch, temperature of bulb rises gradually, when bulb is lighting or not completely cooled, please don't touch bulb with hand.
- If should change bulb, please cut off power first, and change the bulb after bulb have been cooled enough. (For details see direction of changing bulb)
- The bulb must not exceed the specified wattage.
- When protective glass are damaged, must change new one. Don't use without protective glass.
- Please don't look at the lighting bulb directly.
- Be sure to connect ground lead.

DIRECTION OF CHANGE BULB

- Turn off the power.
- Open lamp access cover.
- Twist out bulb slightly.
- Don't touch bulb with bare hand.
- When installing bulb, please twist bulb in socket carefully.
- Before turning on power, replace lamp access cover.

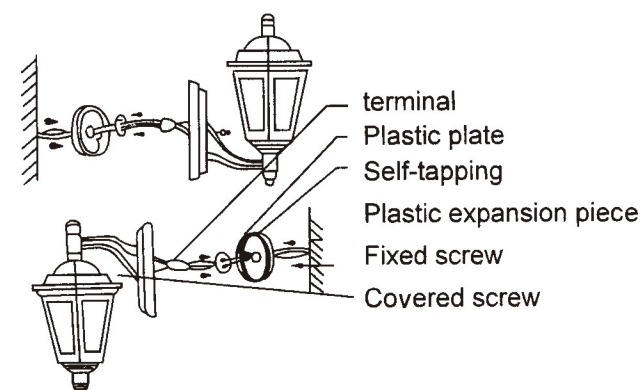


Fig.1

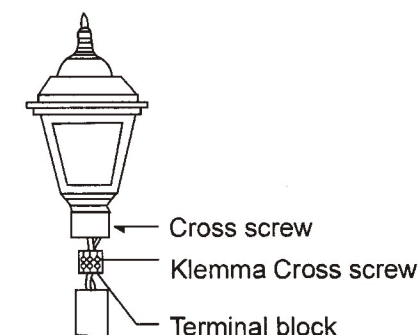


Fig.2

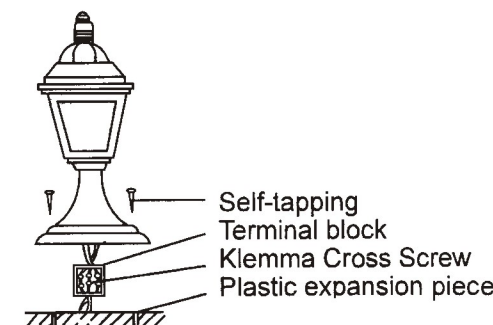


Fig.3

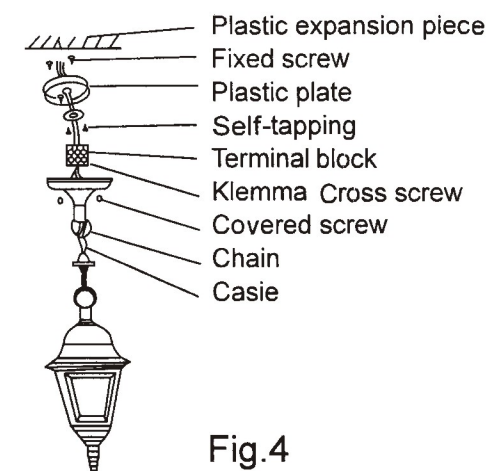


Fig.4

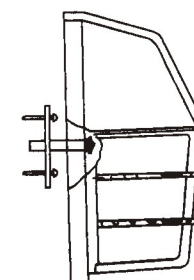


Fig.5

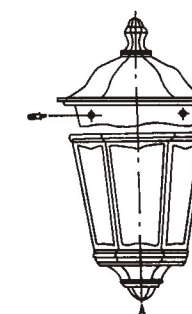


Fig.6