

SAFETY DIRECTIONS



Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference

1. The luminaires may only be installed by authorized and qualified technicians according the valid regulations for electrical installation.
2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
4. Exterior lighting must not be installed during rain.
6. Take account of the minimal separation distance from other objects and the room required around the fitting.
7. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
8. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
9. When replacing a halogen lamp, wait for it to cool, for a minimum of 5 minutes.
10. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
11. Take account of all available technical information.
12. Take note of the symbols when connecting wires:
 - N =Neutral
 - L =Live
 - ⊕ =Earth

13. Meaning of symbols:



For indoor use only, where direct contact with water is impossible



Protection class 1: the fitting must be earthed



Protection class 2: the fitting is double insulated and does not require earthing



Protection class 3: the fitting is low voltage



Observe the indicated minimum distance between the lam and the illuminated materials/objects



Only the self-screening halogen illuminants should be used with the luminaire



Strip the wire to the indicated length



Connect using the specified cable



The armature can be used in combination with a dimmer. Consult the sales outlet for the correct type of dimmer(important in the case of 12V fittings)



Suitable for installing on normal inflammable materials




The maximum wattage indicated in each lighting unit, for example, must not be exceed




This luminaire cannot be disposed together with normal domestic waste in standard rubbish bin, but you have to bring it to a staging area for electrical waste




This luminaire was designed to work only with the indicated voltage

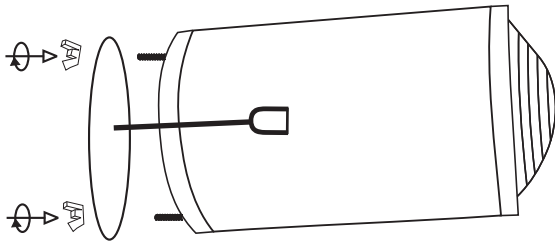


Step 1 : Unscrew the two butter fly screws from the back of the light to open it and in order to install the bulb.

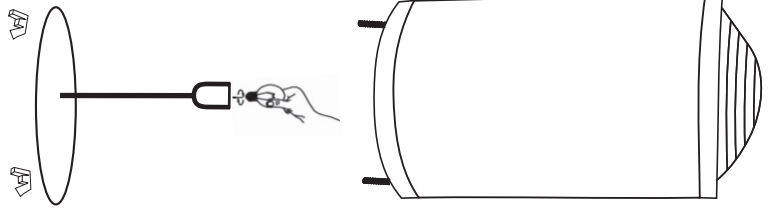

Step 2 : Install an E27 bulb on the lamp holder & close the lens case back using the same butter fly screws as shown in step 1

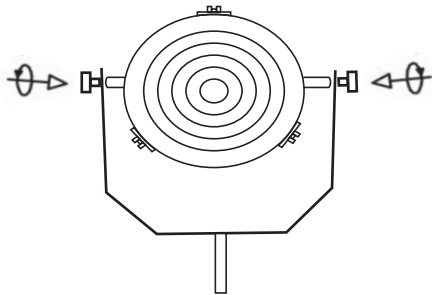


Step 3 : Use the two bracket set screws provided with the lamp to install it with the floor lamp bracket.

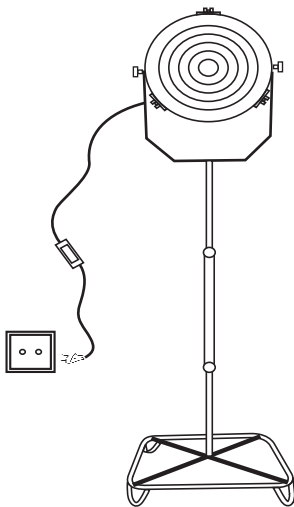


Step 4 : Install the lamp head (already connected to Floor lamp bracket as shown in step 3) to the floor lamp connection tube using the set screw provided with the lamp. There after connect the floor lamp base with the remaining lamp (.ie, combination of lamp head, floor lamp bracket and lamp connection tube)

Step 5 : Connect the plug wire chord set emerging from the lamp into the mains connection, your lamp is now ready to use.

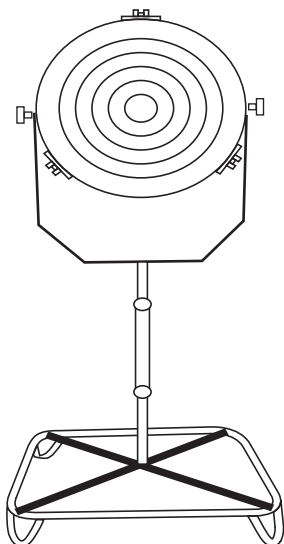

Front View

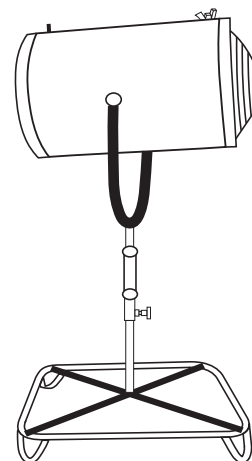

Side View