
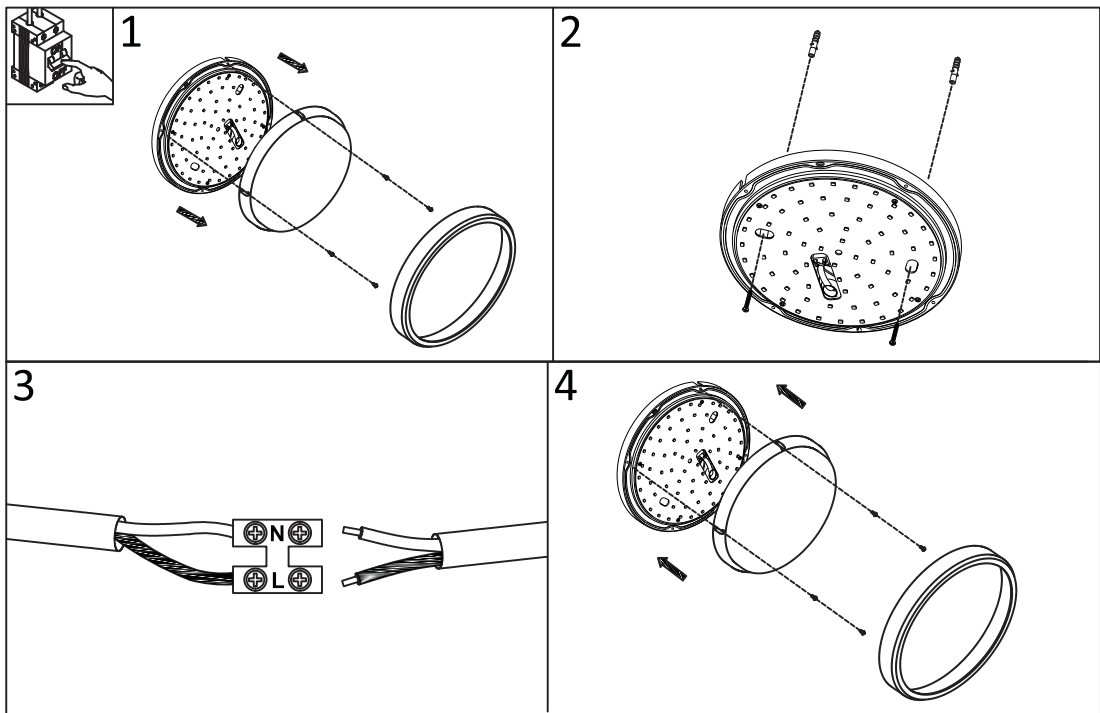



INSTRUCTION MANUAL

United CL 8W Round White/United CL 8W Round White MIR/
 United CL 18W Round White/United CL 18W Round White MIR
 93665/93666/93667/93668

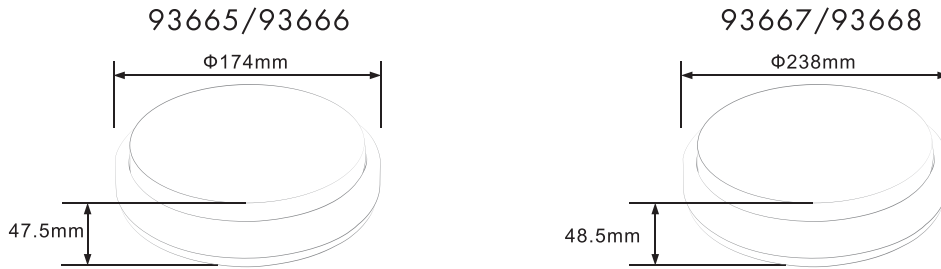

Unchangeable LED
 Max. 8W/18W
 3000K
 RA>80
 25000H

220~240V
 50HZ



IP54



MIR TYPE:(93666/93668) Functional Characteristics


1. Sensors emit high frequency electromagnetic wave and receives their echo, When someone enters the detection range of the products, high-frequency induction switching point lights after a delay period lights automatically turn off.
2. Detection range : 8 metres
3. Detection angle : 180°
4. Delay period : 30 seconds

This item contains unchangeable LED

93665	93666	93667	93668
550 LM	550 LM	1300 LM	1300 LM
8 W	8 W	18 W	18 W
3000 K	3000 K	3000 K	3000 K
>80 CRI	>80 CRI	>80 CRI	>80 CRI
25000 H	25000 H	25000 H	25000 H
220-240 V	220-240 V	220-240 V	220-240 V
12500 ON/OFF	12500 ON/OFF	12500 ON/OFF	12500 ON/OFF

SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference

1. The luminaires may only be installed by authorized and qualified technicians according to the valid regulations for electrical installation.
2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
4. Exterior lighting must not be installed during rain.
6. Take account of the minimal separation distance from other objects and the room required around the fitting.
7. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
8. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
9. When replacing a halogen lamp, wait for it to cool, for a minimum of 5 minutes.
10. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
11. Take account of all available technical information.
12. Take note of the symbols when connecting wires:
N = Neutral **L = Live**  **Earth**
13. Meaning of symbols:



For indoor use only, where direct contact with water is impossible



This icon indicates the level of water-proof and dust-proof



Protection Class I: the fitting must be earthed



Protection Class II: the fitting is doubled insulated and does not require earthing



Protection Class III: the fitting is low voltage



Minimum distance from lighted objects (meters)



Only the self-shielded halogen lamp should be used with the luminaire



Strip the wire to the indicated length (mm)



Connect using the specified cable



The luminaire is suitable for direct mounting on normal inflammable surface



The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceeded



The armature is designed to work only with the indicated voltage. Different items require different working voltage.



The luminaire can be used in combination with a dimmer



The reference light angle and light space of the luminaire



This luminaire cannot be disposed together with normal domestic waste in standard rubbish can, but you have to bring it to a staging area for electrical waste