


- Correcte verwijdering van dit product (Elektrische & elektronische afvalapparatuur)  
 Comment éliminer ce produit (Déchets d'équipements électriques et électroniques)  
 Korrekte Entsorgung dieses Produkts (Elektromüll)  
 Correct disposal of this product (Waste electrical & electronic equipment)  
 Eliminación correcta de este producto (Material eléctrico y electrónico de descarte)  
 Corretto smaltimento del prodotto (Rifiuti elettrici ed elettronici)
- Installeer het armatuur enkel in ruimten waar direct contact met water onmogelijk is.  
 Cet équipement doit être installé dans des pièces hors de toute projection d'eau.  
 Diese Leuchte darf nur in Räumen verwendet werden, in denen ein direkter Kontakt mit Wasser nicht möglich ist  
 This fitting should only be installed in rooms where direct contact with water is impossible  
 Este aparato solamente puede ser instalado en habitaciones donde el contacto directo con el agua sea imposible  
 Questo apparecchio di illuminazione deve essere installato solamente in locali in cui il contatto con l'acqua è impossibile.
- Goederen zijn dubbel geïsoleerd en mogen niet geaard worden  
 Les produits ont une isolation double et ne peuvent pas être mis à la terre  
 Güter sind doppelt isoliert und müssen nicht geerdet werden  
 Goods have double insulation and must not be grounded  
 Los productos tienen un aislamiento doble y no se pueden conectar a tierra  
 I prodotti possiedono un doppio isolamento e non devono essere collegati a terra
- Wisselstroomtoevoer  
 Alimentation AC  
 WS-Zufuhr  
 AC supply  
 Alimentación de CA  
 Alimentazione CA
- Bevestiging plafond opbouw  
 Montage plafond appliqué  
 Montage decke aufgebaut  
 Fixation ceiling surface mounted  
 Montaje techo montado al superficie  
 Montaggio soffitto montato a superficie
- IP20 Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm  
 Protégé contre les objets solides de plus de 12 mm  
 Geschützt gegen Festkörper größer als 12 mm  
 Protected against solid objects greater than 12 mm  
 Protegido contra objetos sólidos superiores a 12 mm  
 Protetto contro oggetti solidi più grandi di 12 mm




- Use only power supplies that are certified according to the applicable IEC or UL safety standards.
- Use only SELV power supplies.
- Check the ratings of the power supply with those of the luminaire.  
 The maximum current rating must be taken into account.  
 The indicated typical voltage must not be used to select a constant voltage power supply but is intended to be used to select a constant current power supply that is able to cover that typical voltage.
- Take appropriate ESD measures. Avoid touching bare conductors.
- Leds or led luminaires that require a current controlled power supply must never be connected in parallel.
- Leds can be damaged by the contact with certain chemicals or chemical gasses.  
 Therefore led domes or led engines should never be cleaned with chemical substances.  
 The following substances have proven to have a negative influence on the performance and must not be used in the direct environment of a led luminaire.  
 Methyl acetate or ethyl acetate (i.e., nail polish remover)  
 Cyanoacrylates (i.e., "Superglue")  
 Glycol ethers (including Radio Shack® Precision Electronics Cleaner - dipropylene glycol monomethyl ether)  
 Formaldehyde or butadiene (including Ashland PLIOBOND® adhesive)  
 Dymax 984-LVUF conformal coating  
 Loctite Sumo Glue  
 Gorilla Glue  
 Bleach, Bleach-containing cleaners, sprays  
 Loctite 384 adhesive  
 Loctite 7387 activator  
 Loctite 242 threadlocker
- Remove insulation and/or provide sufficient ventilation so that the indicated max Tc is not surpassed.
- Leds are susceptible to switching transients. Therefore switching must be done in the primary circuit of the power supply.
- DELTA LIGHT recommends to use the power supplies that are indicated in the Lighting Bible.
- Respect polarity
- Don't test LED luminaires one by one on a powersupply that is switched on.

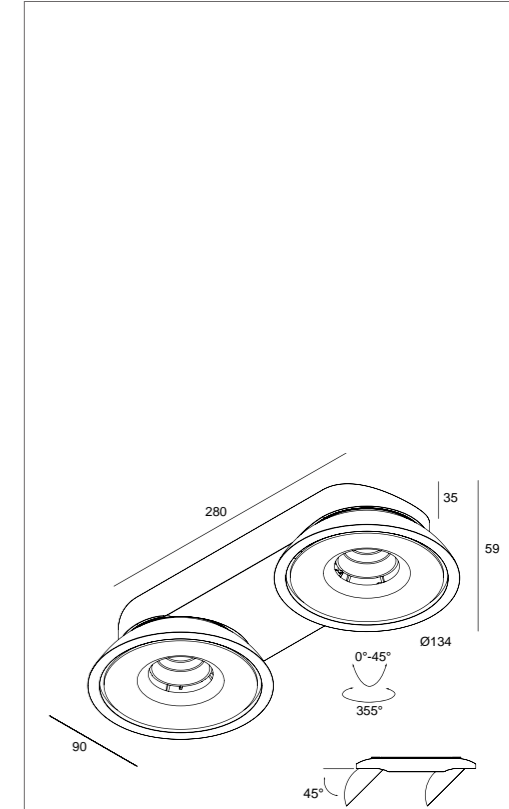

TWEETER ON 2 REO 123033 ◇  
 206 31 12222 ◇  
 ◇ = W  
 INCL.2 x REFLECTOR FL-33°


TWEETER ON 2 REO 123050 ◇  
 206 31 12232 ◇  
 ◇ = W  
 INCL.2 x REFLECTOR WFL-50°

ADJUSTABLE 0-45° / 355°  
 INCL.2 x POWERLED WHITE 12W / 3000K  
 INCL. DIMMABLE LED POWER SUPPLY 700mA-DC  
 CURRENT CONTROLLED  
 MAINS DIMMING (FE)  
 110-240V / 50-60Hz



# TWEETER ON 2 REO

DELTA LIGHT

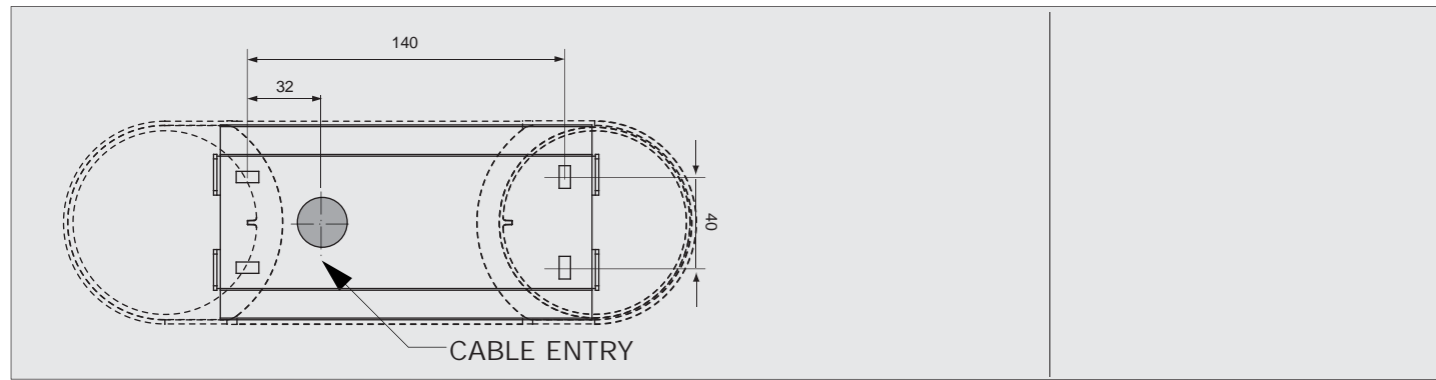

## Accessory Set

