



WWW.QAZQA.COM

Dark WL III PIR LED Solar MODEL: 90502

HOW TO DETERMINE WHERE TO MOUNT YOUR SOLAR PIR SENSOR LIGHT

Please be noted that: DIRECT SUNLIGHT is important for the operation of SOLAR PIR SENSOR LIGHT. The more direct sunlight the solar cell receives in daytime, the longer the light will operate.

Main Unit:

The main unit contains the lamp (2pcs 0.5W LED), motion sensor and battery (NI-MH Rechargeable battery, 3.6V, 600mAh). When determining where to mount this unit, please consider that the motion sensor with detection scope of max. 8 meters (in front of the light) and about 120° (horizontal) at 25 °C environmental temperature. The detection range of the unit may alter with temperature change, the mounting height and location. All Passive Infra-Red detectors are more sensitive in cold and dry weather than warm and humid weather.

To mount the unit vertically as a security light, attach the unit to a solid surface as shown in figure . Use the two screws provided in the package.

Solar Cell:

The solar cell is one of the main power source for the SOLAR PIR SNESOR LIGHT. It converts the sunlight's energy into electricity that charges the battery in main unit. It requires DIRECT SUNLIGHT onto the surface of solar cell for as long as possible during the daytime.

Use the two screws provided in the package to mount the solar cell unit onto a solid surface. Make sure it is fixed into the solid surface.

You can adjust the angle of the solar cell. It should face as much DIRECT SUNLIGHT as possible during the daytime.

At last route the solar cell's power cord to the main unit and plug it into the the side hole for solar cell.

FINAL ADJUSTMENT AND START-UP

After you successfully installed your SOLAR PIR SENSOR LIGHT, you are almost ready for carefree operation with a few final steps:

Initial 2-days Charge:

On the main unit there is a switch with 2 positions:

- OFF
- ON

QAZQA



WWW.QAZQA.COM

ON —












Position for normal operation

OFF ---

1) Position for delivery or long periods of non-use

2) Position for initial 2-day charge before first adjustment and use.

Then, turn the slide switch to OFF position. The solar cell will charge the battery without activating the unit. Leave the switch in this position for 2 sunny days to ensure that the battery has a full charge for motion sensor adjustment and normal operation.

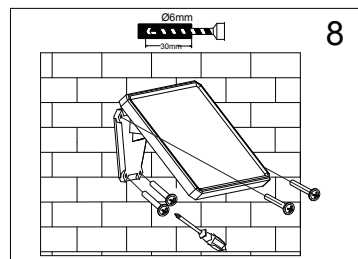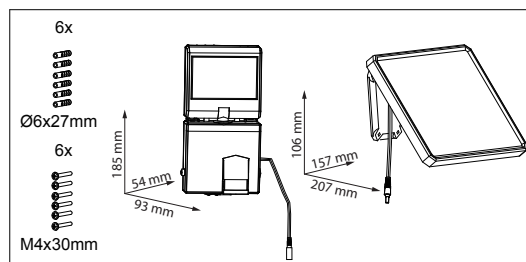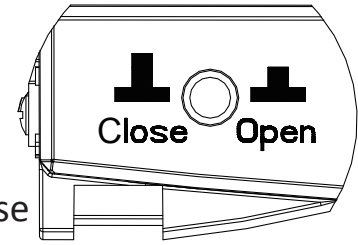


HOW TO ADJUST THE MOTION SENSOR

After the initial 2-day charge, turn the switch to AUTO position.

On the motion sensor there are two adjusting knobs: **TIME / LUX**

1) **TIME** --- Duration time: For how long you wish the light to run after motion is detected in the field, the duration time is from 10 seconds to 1 minute adjustable.

Note: Once the light is activated by the PIR sensor, any subsequent detection will restart the timed period again from the beginning.

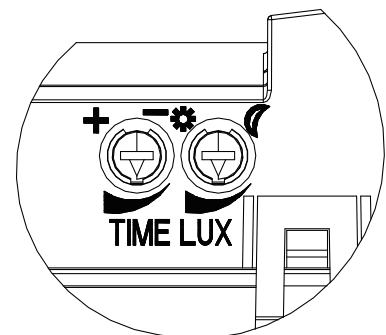



WWW.QAZQA.COM

- 2) LUX – Lux control level: The Lux control module has a built-in sensing device (photocell) that detects daylight and darkness. (✱) position denotes that the loading will be turned on by PIR during day and night, (☽) position denotes that the loading will be turned on by PIR only at night. You can set desired level to run the unit the by adjusting the LUX knob.

Note: If, in daily position, the unit turns on when it is too light outside, turn the control towards (☽). however, if the light is not activating during nighttime because of a street light or bright house light, turn this control towards (✱).

Walking-test:

Point the motion sensor to face the area you want to detect motion in and set the TIME knob to minimum (-) position and LUX knob to “light”(✱) position. Walking slowly in its detection area, the sensor can detects moving invisible infra-red radiation given off by a human body and then turn on the light. Test the coverage of the area by walking slowly around until not to switch on the light.

ADJUSTMENT OF THE LAMP HOUSING:

Point the lamp housing to face the area you wish to illuminate.

GENERAL ELECTRICAL AND SAFETY WARNINGS

- 1) Do not cut the solar cell wire. Discontinue use if the wire becomes frayed or broken.
- 2) Do not immerse components in liquid.
- 3) Do not use any other charge than the single solar charging panel provided with the SOLAR PIR SENSOR LIGHT. This may result in injury or damage to the light and voids any warranty.
- 4) Position so that the cord is securely fastened and will not result in a hazard (such as tripping).
- 5) When changing the battery, be careful of any sharp edges that could cut you or the wires. Do not pull on wires.

CLEANING

It is important that the solar panel is kept free of dirt and debris. A dirty solar panel will not allow the battery to fully charge and this will shorten the life of battery and cause the light to malfunction.

STORAGE

If you wish to store your light indoors for more than two or three days, follow these steps to prevent damage to battery:

1. Turn the switch to OFF position
2. Store the light and solar panel where it can receive some sunlight



WWW.QAZQA.COM

or room light each day. The battery needs light to maintain a charge during storage.

3. During prolonged storage, unit must be fully charge once every four months, for best performance, do not store for prolonged periods.

NOTE THE FOLLOWING TROUBLE-SHOOTING:

1. Symptom: Light won't activate in normal operation.

Correction: make sure that:

- 1) The main unit switch is the ON position.
- 2) The Lux control is not set too far toward (⤵)
- 3) The motion sensor is positioned to face oncoming movement
- 4) The solar cell is angled so that it gets plenty of direct sunlight for most of day, if not the entire day.
- 5) Battery charge is not too low (charge for 2 sunny days—switch turned to OFF)

2. Symptom: Light turns on during the day.

Correction: Make sure that

- 1) The Lux control is not set too far toward (✨)

3. Symptom: Light quickly flashes on and off

Correction:

- 1) Move the Lux control toward (✨)
- 2) Low battery (charge for 2 sunny days—switch turned to OFF).

4. Symptom: Light is not as bright as normal.

Correction:

- 1) Low battery (charge for 2 sunny days—switch turned to OFF).

TECHNICAL DETAILS:

Voltage:	220-240 V ~ 50 Hz
Battery:	3x1.2V AA 600mAh Ni-MH Rechargeable battery
Wattage:	2 ×0.5W LED
Detection range:	120° and Max. 8 meters
Duration time:	from 10 seconds to 60 seconds adjustable
Weatherproof:	IP44