

INSTRUCTION MANUAL







Highway HL Black 93995

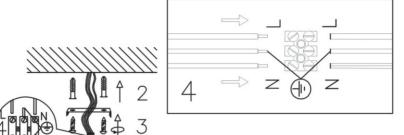

- 1. Switch off the main power supply
- 2 and 3. Use screws to mount the bracket on the ceiling.
- 4. Connect the electrical cable of the lamps with the mains wire.
- 5. Screw the side screws provided with the ceiling rose to mount the ceiling rose on the bracket.
- 6. Unscrew the metal rim to fixup the bulb

CAUTION


Be careful while removing / Installation of glass with the lamp, as the glass is not gllued with the ring at the bottom.

- 7. Use an E27 threaded bulb on the lamp holder to light the lamp.
- 8. Use the side screws at the bottom of the shades to fix the glass at the bottom



SAFETY DIRECTIONS


Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference



- 2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
- 3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
- 4. Exterior lighting must not be installed during rain.
- 6. Take account of the minimal separation distance from other objects and the room required around the fitting.
- 7. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
- 8. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
- 9. When replacing a halogen lamp, wait for it to cool, for a minimum of 5 minutes.
- 10. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
- 11. Take account of all available technical information.
- 12. Take note of the symbols when connecting wires:

N = Neutral

- L =Live
- =Earth
- 13. Meaning of symbols:

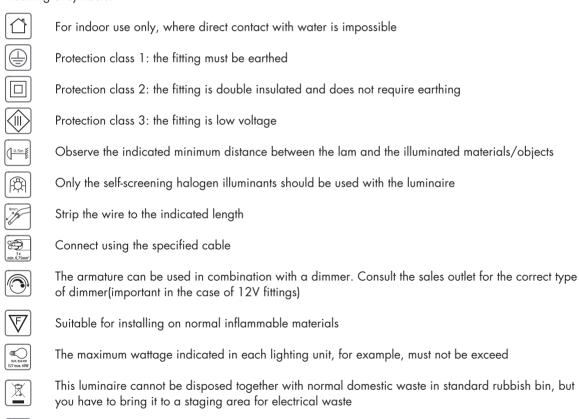

This luminaire was designed to work only with the indicated voltage



220~240V 50~60HZ