
## **INSTRUCTION MANUAL**

Q


94913 Dexter HL Black



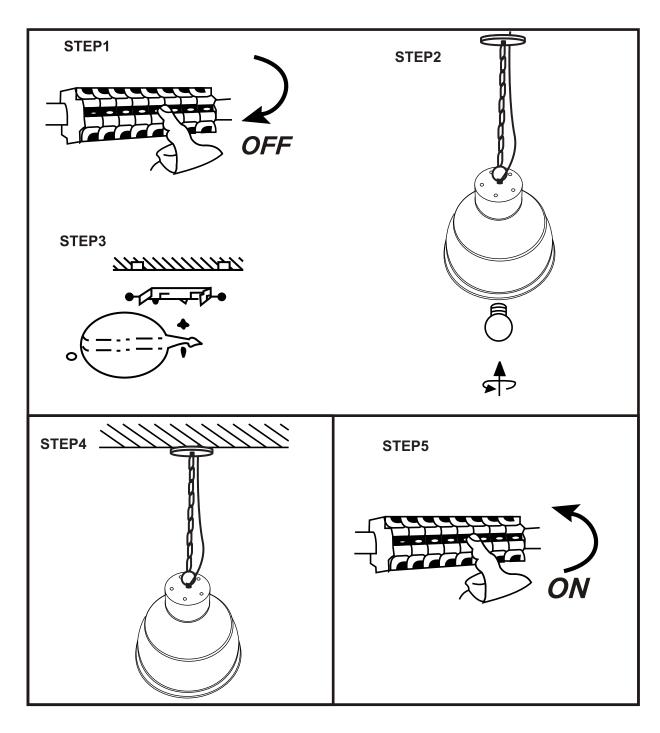

## SAFETY DIRECTIONS

Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference



- 2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
- 3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
- 4. Exterior lighting must not be installed during rain.
- 6. Take account of the minimal separation distance from other objects and the room required around the fitting.
- 7. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
- 8. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
- 9. When replacing a halogen lamp, wait for it to cool, for a minimum of 5 minutes.
- 10. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
- 11. Take account of all available technical information.
- 12. Take note of the symbols when connecting wires:

N = Neutral

L =Live

= Earth

13. Meaning of symbols:



F or indoor use only, where direct contact with water is impossible



P rotection class 1: the fitting must be earthed



P rotection class 2: the fitting is double insulated and does not require earthing



P rotection class 3: the fitting is low voltage



O bserve the indicated minimum distance between the lam and the illuminated materials/objects



O nly the self-screening halogen illuminants should be used with the luminaire




S trip the wire to the indicated length



C onnect using the specified cable



T he armature can be used in combination with a dimmer. Consult the sales outlet for the correct type





S uitable for installing on normal inflammable materials



T he maximum wattage indicated in each lighting unit, for example, must not be exceed



T his luminaire cannot be disposed together with normal domestic waste in standard rubbish bin, but





T his luminaire was designed to work only with the indicated voltage



