SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference

- 1. The luminaires may only be installed by authorized and qualified technicians according the valid regulations for electrical installation.
- 2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
- 3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
- 4. Exterior lighting must not be installed during rain.
- 6. Take account of the minimal separation distance from other objects and the room required around the fitting.
- 7. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
- 8. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
- 9. When replacing a halogen lamp, wait for it to cool, for a minimum of 5 minutes.
- 10. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
- 11. Take account of all available technical information.

12. Take note of the symbols when connecting wires: **N = Neutral L = Live (=) = Earth**


13. Meaning of symbols:

Protection Class I: the fitting must be earthed Protection Class II: the fitting is doubled insulated and does not require earthing Protection Class III: the fitting is low voltage Minimum distance from lighted objects (meters) Only the self-shielded halogen lamp should be used with the luminaire	Ivlean	ing of symbols:
Protection Class I: the fitting must be earthed Image: Protection Class II: the fitting is doubled insulated and does not require earthing Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Class III: the fitting is low voltage Image: Protection Protection Protection Protection Protection Protection Protection Protection Pro		For indoor use only, where direct contact with water is impossible
 Protection Class II: the fitting is doubled insulated and does not require earthing Protection Class III: the fitting is low voltage Protection Class III: the fitting is low voltage Minimum distance from lighted objects (meters) Only the self-shielded halogen lamp should be used with the luminaire Strip the wire to the indicated length (mm);different items require different length Connect using the specified cable; different items require different cables The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceed; different items require different bulb icons The armature is designed to work only with the indicated voltage. Different items require different working voltage. The luminaire can be used in combination with a dimmer The reference light angle and light space of the luminaire This luminaire cannot be disposed together with normal domestic waste in standard rubbish 	IPXX	This icon indicates the level of water-proof and dust-proof
Protection Class III: the fitting is low voltage Image: Strip the self-shielded halogen lamp should be used with the luminaire Image: Strip the wire to the indicated length (mm); different items require different length Image: Strip the wire to the indicated length (mm); different items require different length Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the top of lamp and maximum size and wattage indicated in each lighting unit must not be exceed; different items require different kind of light sources with different bulb icons Image: Strip the armature is designed to work only with the indicated voltage. Different items require different working voltage. Image: Strip the uminaire can be used in combination with a dimmer Image: Strip the reference light angle and light space of the luminaire Image: Strip the reference light angle and light space of the luminaire Image: Strip the luminaire cannot be disposed together with normal domestic waste in standard rubbish		Protection Class I: the fitting must be earthed
Winimum distance from lighted objects (meters) Image: Constant of the self-shielded halogen lamp should be used with the luminaire Image: Constant of the self-shielded halogen lamp should be used with the luminaire Image: Constant of the self-shielded halogen lamp should be used with the luminaire Image: Constant of the self-shielded halogen lamp should be used with the luminaire Image: Constant of the self-shielded halogen lamp should be used with the luminaire Image: Constant of the self-shielded halogen lamp should be used with the sequire different length Image: Constant of the self-shielded cable; different items require different cables Image: Constant of the specified cable; different items require different cables Image: Constant of the specified cable; different items require different cables Image: Constant of the specified cable; different items require different bulb icons Image: Constant of the specified to work only with the indicated voltage. Different items require different working voltage. Image: Constant of the luminaire can be used in combination with a dimmer Image: Constant of the specified and light space of the luminaire Image: Constant of the specified and light space of the luminaire Image: Constant of the specified and light space of the luminaire Image: Constant of the specified and light space of the luminaire Image: Constant of the specified and light space of the luminaire <		Protection Class II: the fitting is doubled insulated and does not require earthing
 Only the self-shielded halogen lamp should be used with the luminaire Strip the wire to the indicated length (mm); different items require different length Connect using the specified cable; different items require different cables The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceed; different items require different kind of light sources with different bulb icons The armature is designed to work only with the indicated voltage. Different items require different working voltage. The luminaire can be used in combination with a dimmer The reference light angle and light space of the luminaire This luminaire cannot be disposed together with normal domestic waste in standard rubbish 		Protection Class III: the fitting is low voltage
Strip the wire to the indicated length (mm); different items require different length Image: Strip the wire to the indicated length (mm); different items require different length Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different cables Image: Strip the wire to the indicated length (mm); different items require different work of light sources with different bulb icons Image: Strip the armature is designed to work only with the indicated voltage. Different items require different working voltage. Image: Strip the luminaire can be used in combination with a dimmer Image: Strip the reference light angle and light space of the luminaire Image: Strip the luminaire cannot be disposed together with normal domestic waste in standard rubbish	0.5m	Minimum distance from lighted objects (meters)
Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different items require different cables Image: Stress of the specified cable; different cable; different cables Image: Stress of the specified cable; different cable; different;		Only the self-shielded halogen lamp should be used with the luminaire
Image: and states Im	8mm	Strip the wire to the indicated length (mm);different items require different length
 Marson Be exceed; different items require different kind of light sources with different bulb icons The armature is designed to work only with the indicated voltage. Different items require different working voltage. The luminaire can be used in combination with a dimmer The reference light angle and light space of the luminaire This luminaire cannot be disposed together with normal domestic waste in standard rubbish 	3×	Connect using the specified cable; different items require different cables
The armature is designed to work only with the indicated voltage. Different items require different working voltage. The luminaire can be used in combination with a dimmer Uther Arele The reference light angle and light space of the luminaire This luminaire cannot be disposed together with normal domestic waste in standard rubbish	Max.ø50mm GU10 2Max.50W	
The reference light angle and light space of the luminaire This luminaire cannot be disposed together with normal domestic waste in standard rubbish		
This luminaire cannot be disposed together with normal domestic waste in standard rubbish		The luminaire can be used in combination with a dimmer
	Light Angle	The reference light angle and light space of the luminaire
		•



INSTRUCTION MANUAL











Installa SL White 96755

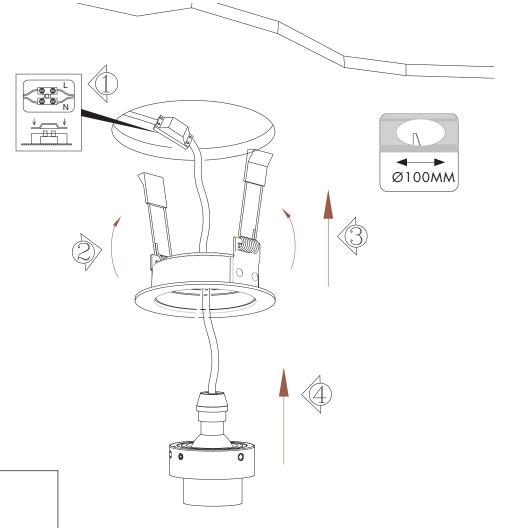


Overall Sizes:

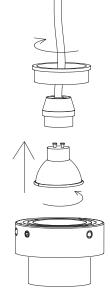

Q A Z Q A

Suitable light source: GU10 Max.35W

Warning: When replacing a hologen lamp,waif for it to cool,for a minimum of 5 minutes

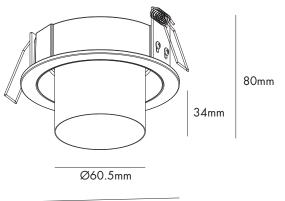

Ø106mm

Q