
INSTRUCTION MANUAL



Movie SL Black GU10 Flaps 96892

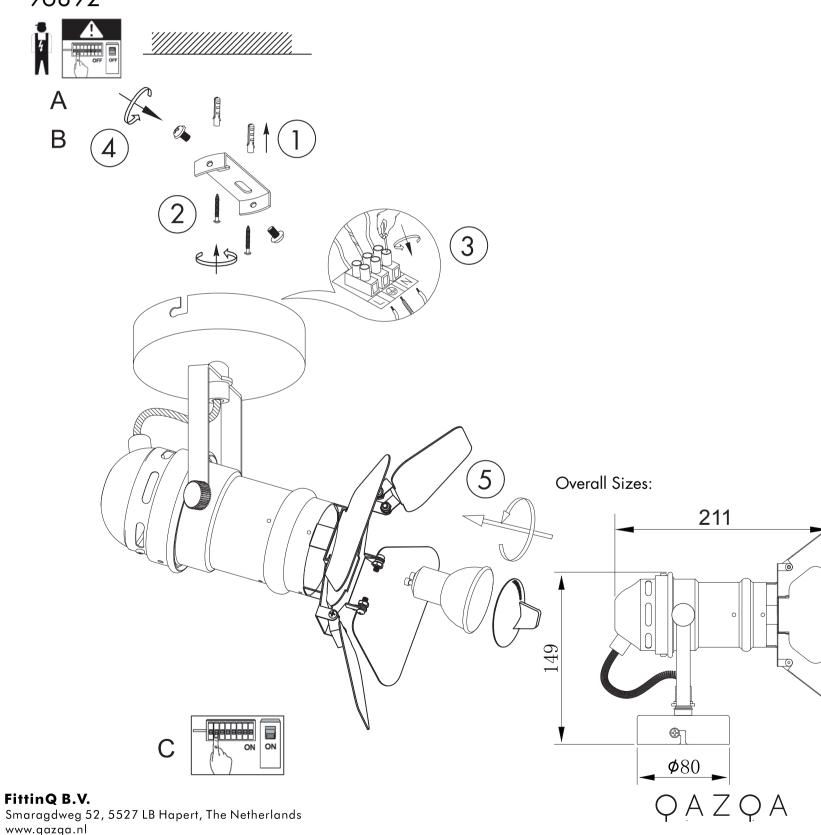

Please keep this user manual for further reference

- 1. The luminaires may only be installed by authorized and qualified technicians according the valid regulations for electrical installation.
- 2 Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
- 3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
- 4. Exterior lighting must not be installed during rain.
- 5. Take account of the minimal separation distance from other objects and the room required around the fitting. 6. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
- low voltage conductors.
- components 9. Take account of all available technical information.
- 10.Meaning of symbols:

	For indoc	or use o	nly, v
IPXX	This icon	indicat	tes th
	Protection	n Class	l: the
	Protectio	n Class	II: th
	Protectio	n Class	III: †ł
	Minimum	n distan	ce fro
Max.ø50mm GU10 2Max.50W	The type be excee		
220-240V~ 50Hz	The armo		-
	The lumi	naire c	an be
Light Angle	The refe	rence li	ght a
	This lum can, but		
11.Take r	note of the	symbo	ls wh
			()
		L	Stromf Le
\prod) () © N		Schut
Ľ		Ν	Neutr
			(!
			Ctuäna

FittinQ B.V. Smaragdweg 52, 5527 LB Hapert, The Netherlands www.qazqa.nl

Ν

SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product.

- 7. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V
- 8. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical
 - where direct contact with water is impossible
 - ne level of water-proof and dust-proof
 - e fitting must be earthed
 - he fitting is doubled insulated and does not require earthing
 - the fitting is low voltage
 - om lighted objects (meters)
 - I maximum size and wattage indicated in each lighting unit must not items require different kind of light sources with different bulb icons
 - igned to work only with the indicated voltage. Different items require ltage.
 - e used in combination with a dimmer
 - angle and light space of the luminaire
 - ot be disposed together with normal domestic waste in standard rubbish bring it to a staging area for electrical waste

en connecting wires:

(DE)	(GB)	(FR)	(NL)	(PL)	(NO)	(DK)
Stromführender Leiter	Live conductor	Conducteur	Spanning- voerende draad	Przewód prądowy	Strømførende leder	Strømførende leder
Schutzleiter	Earth conductor	Conducteur de protection (terre)	Aardkabel	Przewód uziemiający	Jordledningen	Jordledningen
Neutralleiter	Neutral conductor	Conducteur neutre	Nulleider	Przewód zerowy	Nøytralleder	Neutralleder
(SE)	(FI)	(IT)	(ES)	(CZ)	(PT)	(GR)
Strömförande ledare	Virtajohdin	Conduttore sotto tensione	Conductor de corriente	Vodič pod napětím	Condutor vivo	Ρευματοφόρος αγωγός
Skyddsledare	Suojajohdin	Conduttore di terra	Conductor de protección	Ochranný vodič	Condutor de terra	Αγωγός γείωσης
Neutralledare	Nollajohdin	Conduttore neutro	Conductor neutro	Neutrální vodič	Condutor neutro	Ουδέτερος αγωγός



