

INSTRUCTION MANUAL



Lofty CL Black 3 98304 Lofty CL White 3 98305 Lofty CL 3 Black Gold 105424



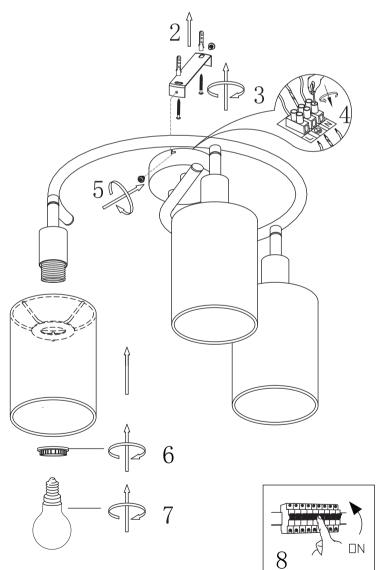


FittinQ B.V. Smaragdweg 52, 5527 LB Hapert, The Netherlands www.qazqa.nl









QAZQA

١.					be installed i
2					installation. inaires is lim
Z					eas of the te
3.					t be switched
5.					on, maintend
4.					be installed
5.					nal separatio
6.					professional
					, y be installed
7.					rical connect
		ltage co			
8.			lear	n, dry cl	oth or brush
•	compo				
					ble technical
10.	Meani	ng of syr	nbo	ls:	
		Foring	امم	r iise o	nly, where a
			100	1 030 0	iny, where c
	IPXX	This ic	on	indicat	tes the level
		Protect	lion		I: the fitting
			101		n. me mini
		Ì			
		Protec	tior	n Class	II: the fittin
		J			
	$\left \right\rangle$	Ductor		Class	111. ih a fiu:.
		Froiec	1101	l Class	III: the fitti
		, I			
	0.5m	Minim	υm	distan	ce from ligl
		J			
		The ty	peo	of lamp	o and maxir
	Max.ø50mm GU10 2Max.50W	be exc	eec	l; diffe	rent items r
	220-240V- 50Hz				designed to
	50HZ	Jdittere	ent	workın	g voltage.
)			
	19	Inelu	mır	naire co	an be used
	Light Angle	Ś			
	55°		fer	ence li	ght angle a
	35cm ²)			
		This lu	ımi	naire c	annot be d
					ve to bring
			-		-
11	.Take r	note of t	he	symbo	ls when cor
					(DE)
			[L	Stromführender
	· · · · ·		n		Leiter
		$\left\{ \right\}$		Ē	Schutzleiter
	11 1	1 11			1

€

C

FittinQ B.V. Smaragdweg 52, 5527 LB Hapert, The Netherlands www.qazqa.nl

Ν

L

Ν

SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference

1. The luminaires may only be installed by authorized and qualified technicians according the valid

- limited to their surfaces. During maintenance no moisture can come ne terminal connections or voltage control parts.
- ched off at the outset, preferably by means of a switch in the distribution tenance or repair work is undertaken.
- lled during rain.
- ration distance from other objects and the room required around the fitting. onal, taking local installation requirements into account. Some countries alled only by registered installers.
- nections must be adequately tightened. This is particularly the case with 12V
- rush, use no solvents or abrasives. Avoid dampness on all electrical
- nical information.
- ere direct contact with water is impossible
- evel of water-proof and dust-proof
- tting must be earthed
- itting is doubled insulated and does not require earthing
- fitting is low voltage
- lighted objects (meters)
- aximum size and wattage indicated in each lighting unit must not ms require different kind of light sources with different bulb icons
- ed to work only with the indicated voltage. Different items require
- ed in combination with a dimmer
- le and light space of the luminaire

e disposed together with normal domestic waste in standard rubbish ing it to a staging area for electrical waste

connecting wires:

Neutralleiter

(SE)

ledare

Skyddsledare

Neutralledare

(GB)	(FR)	(NL)	(PL)	(NO)	(DK)
Live conductor	Conducteur	Spanning- voerende draad	Przewód prądowy	Strømførende leder	Strømførende leder
Earth conductor	Conducteur de protection (terre)	Aardkabel	Przewód uziemiający	Jordledningen	Jordledningen
Neutral conductor	Conducteur neutre	Nulleider	Przewód zerowy	Nøytralleder	Neutralleder
(FI)	(IT)	(ES)	(CZ)	(PT)	(GR)
Virtajohdin	Conduttore sotto tensione	Conductor de corriente	Vodič pod napětím	Condutor vivo	Ρευματοφόρος αγωγός
Suojajohdin	Conduttore di terra	Conductor de protección	Ochranný vodič	Condutor de terra	Αγωγός γείωσης
Nollajohdin	Conduttore neutro	Conductor neutro	Neutrální vodič	Condutor neutro	Ουδέτερος αγωγός



