INSTRUCTION MANUAL


















Q

Torre TL Black 63 cm 98864 Bulb & Shade Not Included

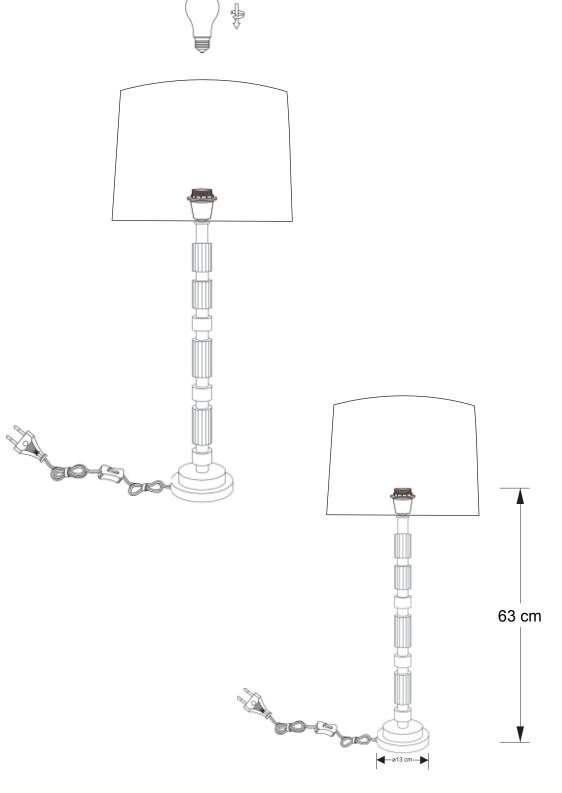

ϘΑΖϘΑ

## FittinQ B.V. Smaragdweg 52, 5527 LB Hapert, The Netherlands www.qazqa.nl


## SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference

- The luminaires may only be installed by authorized and qualified technicians according the valid regulations for electrical installation.
- Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
- 3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
- 4. Exterior lighting must not be installed during rain.
- 5. Take account of the minimal separation distance from other objects and the room required around the fitting.
- If in any doubt, consult a professional, taking local installation requirements into account. Some countries
  stipulate that lighting may be installed only by registered installers.
- Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
- 8. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
- 9. Take account of all available technical information.
- 10.Meaning of symbols:

	For indoor use only, where direct contact with water is impossible
IPXX	This icon indicates the level of water-proof and dust-proof
	Protection Class I: the fitting must be earthed
	Protection Class II: the fitting is doubled insulated and does not require earthing
	Protection Class III: the fitting is low voltage
(] <sup>0.5m</sup>	Minimum distance from lighted objects (meters)
Max.eS0mm GU10 3Max.S0W	The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceed; different items require different kind of light sources with different bulb icons
230V~ 50Hz	The armature is designed to work only with the indicated voltage. Different items require different working voltage.
	The luminaire can be used in combination with a dimmer
Light Angle	The reference light angle and light space of the luminaire
X	This luminaire cannot be disposed together with normal domestic waste in standard rubbish can, but you have to bring it to a staging area for electrical waste

11. Take note of the symbols when connecting wires:



	(DE)	(GB)	(FR)	(NL)	(PL)	(NO)	(DK)
L	Stromführender Leiter	Live conductor	Conducteur	Spanning- voerende draad	Przewód prądowy	Strømførende leder	Strømførende leder
	Schutzleiter	Earth conductor	Conducteur de protection (terre)	Aardkabel	Przewód uziemiający	Jordledningen	Jordledningen
N	Neutralleiter	Neutral conductor	Conducteur neutre	Nulleide <sup>*</sup>	Przewód zerowy	Nøytralleder	Neutralleder
	(SE)	(FI)	(IT)	(ES)	(CZ)	(PT)	(GR)
Ľ	Strömförande ledare	Virtajohdin	Conduttore sotto tensione	Conductor de corriente	Vodić pod napětím	Condutor vivo	Ρευματοφόρος αγωγός
5							
	Skyddsledare	Suojajohdin	Conduttore di terra	Conductor de protección	Ochranný vodič	Condutor de terra	Αγωγός γείωσης

