
SAFETY DIRECTIONS

Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference



- 2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
- 3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
- 4. Exterior lighting must not be installed during rain.
- 6. Take account of the minimal separation distance from other objects and the room required around the fitting.
- 7. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
- 8. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
- 9. When replacing a halogen lamp, wait for it to cool, for a minimum of 5 minutes.
- 10. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
- 11. Take account of all available technical information.
- 12. Take note of the symbols when connecting wires:
 - N = Neutral
 - L =Live
 - =Earth
- 13. Meaning of symbols:

	•
	For indoor use only, where direct contact with water is impossible
	Protection class 1: the fitting must be earthed
	Protection class 2: the fitting is double insulated and does not require earthing
	Protection class 3: the fitting is low voltage
0.5m	Observe the indicated minimum distance between the lam and the illuminated materials/objects
	Only the self-screening halogen illuminants should be used with the luminaire
8mm	Strip the wire to the indicated length
3 x min. 0,75mm²	Connect using the specified cable
	The armature can be used in combination with a dimmer. Consult the sales outlet for the correct type of dimmer(important in the case of 12V fittings)
F	Suitable for installing on normal inflammable materials
MAX. Red Man E27 max. 60W	The maximum wattage indicated in each lighting unit, for example, must not be exceed
	This luminaire cannot be disposed together with normal domestic waste in standard rubbish bin, but you have to bring it to a staging area for electrical waste
220~240V	This luminaire was designed to work only with the indicated voltage




INSTRUCTION MANUAL

Mono FL 2 Graphite (97808)

Assembly:

Please follow below instructions to assemble this lamp:

- 1. Connect Part B (connecting T-tube) of the lamp with Part C (base with wheels) of the lamp using set screw (D).
- 2. Install Part A (2 pre-wired lamp shade) to Part B using the wing nuts (E) as shown below.
- 3. Place the assembled floor lamp near a electrical outlet.
- 4. Thread 2x E27 light bulbs to the light sources of the floor lamp.
- 5. Connect the plugin chord set emerging out from the floor lamp into the mains connections.
- 6. Your lamp is now ready to use.

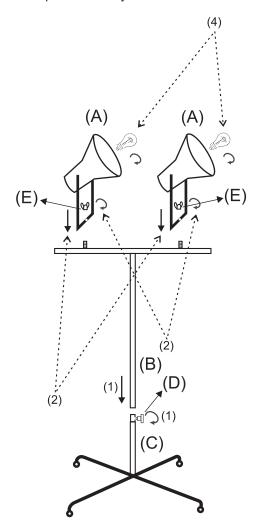

Parts & Hardware Included:

- (A) Base with wheels 1
- (B) Connecting T tube 1
- (C) Pre-wired Lamp shade 2
- (D) Set screw 1
- (E) Wing nut 2

